



Build your own R-Value with

## NUDURA Plus+ Forms

NUDURA has always driven product innovation and has led the industry with its innovative line of Insulated Concrete Forms. That innovation continues with the NUDURA Plus+ Series.

Improving the thermal performance of the building envelope is a key aspect when looking for energy efficient building materials. Optimizing R-Value with thermal mass has shown to be the best method of providing significant energy savings to building owners.

NUDURA has taken its standard line of Insulated Concrete Forms to the next level. The NUDURA Plus+ Forms are available in four sizes, 1" (25 mm), 2" (50 mm), 4" (100 mm) and 6" (150 mm) and now offer R-Values as high as R-48. The focus of today's property owners, designers, building developers and contractors is to build environmentally sustainable buildings, that meet their personal needs, and the needs of their clients.

The NUDURA Plus+ Forms are engineered to address the growing industry's demand for increased exterior insulation. The NUDURA Plus+ Forms come factory ready for installation. With this innovative design all of the key benefits of NUDURA can be used. DURALOK Technology™ allows installers the ability to install faster and more efficiently. DURAMAX Technology™ allows builders the advantage of placing the largest standard form in the ICF Industry. DURAFOLD Technology™ ships flat, reducing overall shipping costs, maximizing storage space on site, simply unfold and stack. The innovative reversible design, reduces waste on-site.

### Available thicknesses



1" (25 mm)  
R-value - 28





2" (50 mm)  
R-value - 32



4" (102 mm)  
R-value - 40



6" (150 mm)  
R-value - 48

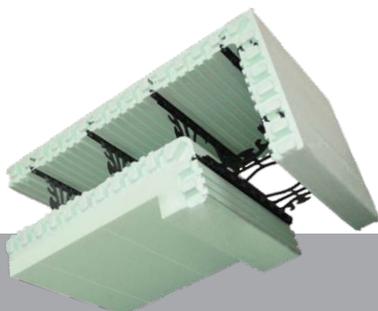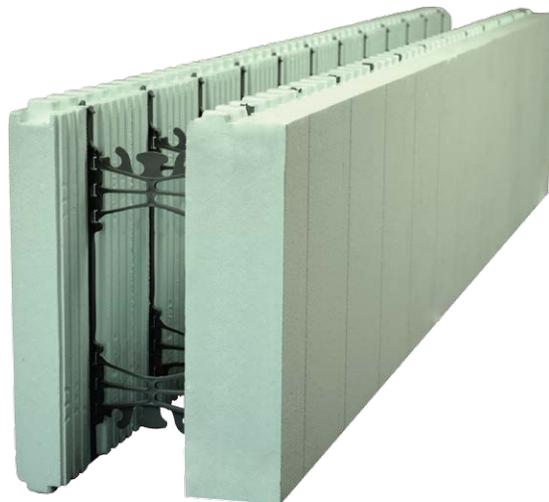




## Build your own R-Value with R-Value Inserts

The NUDURA R-Value Inserts allow the ability to customize the desired amount of insulation needed to meet the specific requirements of any project. The inserts are available in 3 standard sizes: 2" (50 mm), 4" (100 mm) and 6" (150 mm). Custom combinations can be created to provide further insulation value if desired and are compatible with all sizes of forms offered by NUDURA, with core sizes ranging from 4" (100 mm) to 12" (300 mm).

The R-Value Inserts were engineered to integrate into any NUDURA Form unit, allowing for increased R-Values, while at the same time not interfering with the unique technological characteristics of NUDURA Forms. The NUDURA line of forms offer innovation that is exclusive to NUDURA, which allow builders, architects and engineers the ability to build and design commercial and residential structures with greater efficiency. The DURAFOLD, DURAMAX and DURALOK Technology™ along with our 4-Way Reversible System, offer patented technology that is only available from NUDURA, in all form types and sizes.

Using the R-Value Plus+ insert is easy. Once the desired size is chosen the R-Value Insert is simply slid into one side of a NUDURA Form Unit. With the unique dovetail system, the inserts are securely placed during the construction process. Because of the unique form attributes that NUDURA offers, the speed of construction is increased over conventional building methods and other insulated concrete form products on the market. With the R-Value Inserts NUDURA provides R-Values that meet and exceed code for sustainable homes and offer R-Values from R-33 to as high as R-47.

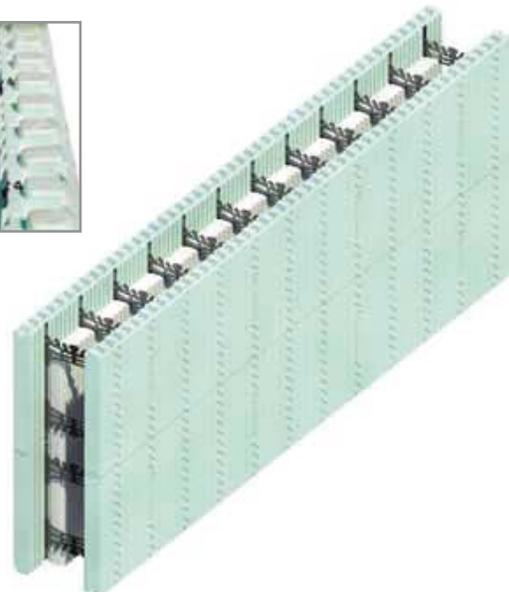


### Available insert thicknesses



2" (50 mm)  
R-value - 33



4" (100 mm)  
R-value - 40

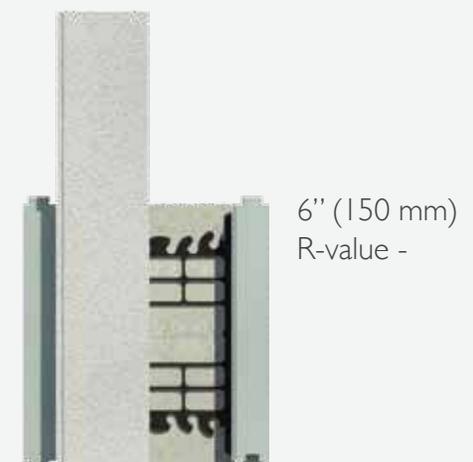

6" (150 mm)  
R-value -

6" (150 mm) concrete core R-Value ratings based on exterior brick finish